

Owner's Manual & Safety Instructions

Save This Manual Keep this manual for the safety warnings and precautions, assembly, operating, inspection, maintenance and cleaning procedures. Write the product's serial number in the back of the manual near the assembly diagram (or month and year of purchase if product has no number). Keep this manual and the receipt in a safe and dry place for future reference.



ULTRA TASK ROLLING TOOL CABINET



MODELS:

- 1pc x 22"x22" Side Locker
- 1pc x 56"x22" Roller Cabinet with Power Bank
- 1pc x 56"x22" Work Hutch
- 1pc x 15"x22" Side Cabinet

Visit our website at: www.toosa.ca


Email our technical support at: Sales@toosa.ca

When unpacking, make sure that the product is intact and undamaged. If any parts are missing or broken, please call **778-939-9494** as soon as possible.

⚠ WARNING

Read this material before using this product.
Failure to do so can result in serious injury.
SAVE THIS MANUAL.

PARTS LIST

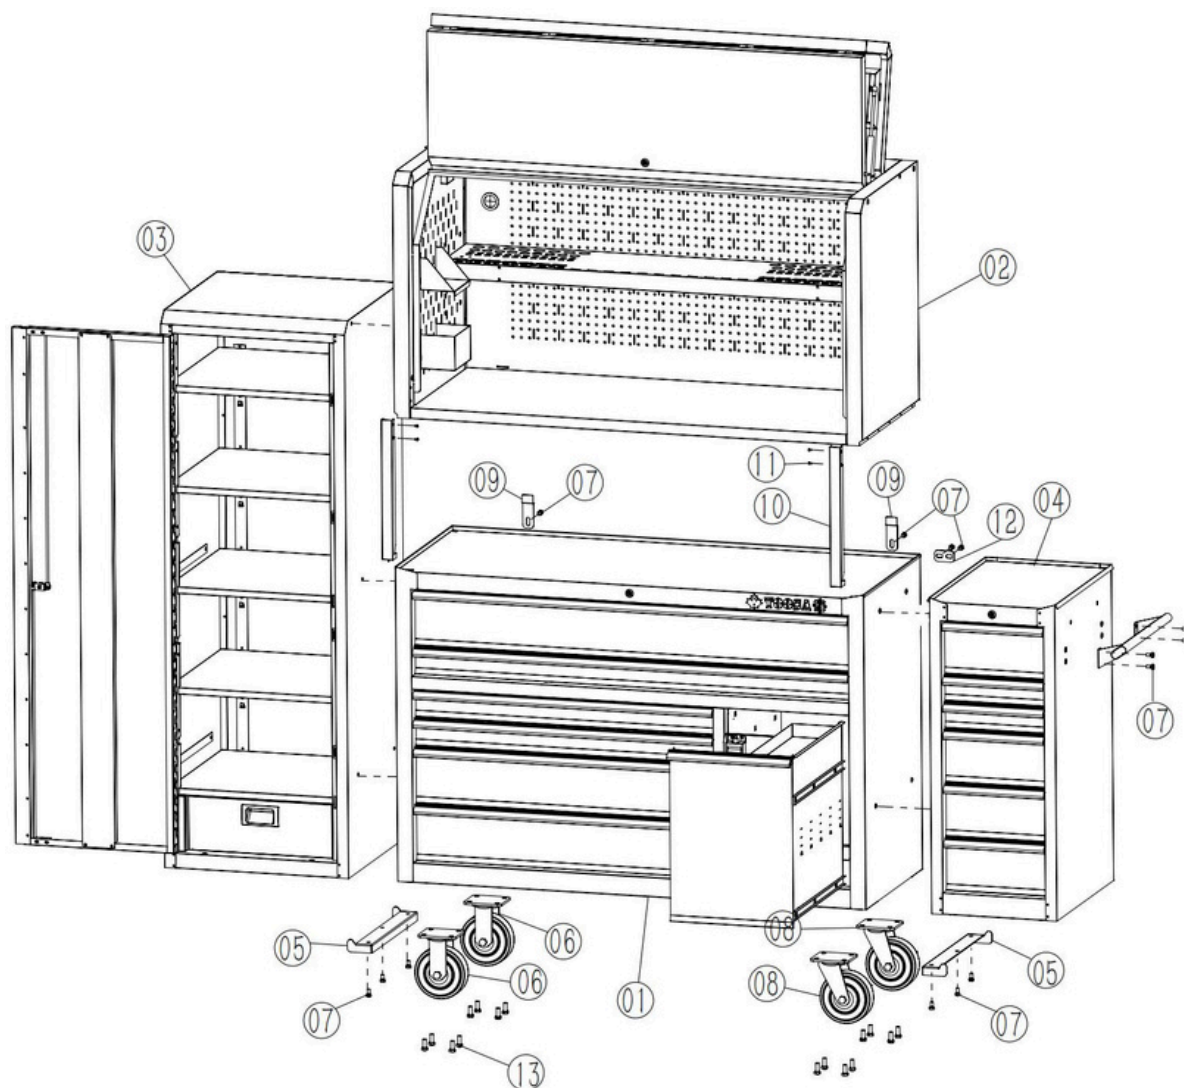

N0.	Description	QTY	N0.	Description	QTY
01	56 in. x 22 in. roller cabinet	1	08	6"swivel casters with brakes	2
02	56 in. x 22 in. work hutch	1	09	rear connector for roller cab. & hutch	2
03	22 in. x 22 in. side locker	1	10	front connector for roller cab. & hutch	2
04	15 in. x 22 in. side cabinet	1	11	M4x8 phillips countersunk head screws	4
05	holder for roller cab. & locker/cab.	2	12	connector for roller cab. & side cabinet	1
06	6"fixed casters	2	13	M10x25 hex socket head cap screw	16
07	M8x16 pan head hex socket screw	22	14	side handle	1

IMPORTANT SAFETY INSTRUCTIONS

READ AND FOLLOW ALL INSTRUCTIONS

Assembly Precautions

1. Assemble only according to these instructions. Improper assembly can create hazards.
2. Wear ANSI-approved safety goggles and heavy-duty work gloves during assembly.
3. Keep assembly area clean and well lit.
4. Keep bystanders out of the area during assembly.
5. Do not assemble when tired or when under the influence of alcohol, drugs or medication.
6. Weight capacity and other product capabilities apply to properly and completely assembled product only.
7. Assemble on a flat, level, hard and smooth surface capable of safely supporting a fully loaded Cabinet.


ASSEMBLY INSTRUCTIONS

Install Work Hutch on Roller Cabinet

Insert the square connectors into the square holes located on the front side of the roller cabinet. Ensure that the screw holes on the connectors face inward.

Align the square tube connector with the corresponding holes on the hutch. Then, carefully lift the hutch and lower it onto the top of the roller cabinet, allowing the connectors to engage.

Secure the hutch to the connectors using 2 pieces of M4x8 Phillips countersunk head screws for each connector.

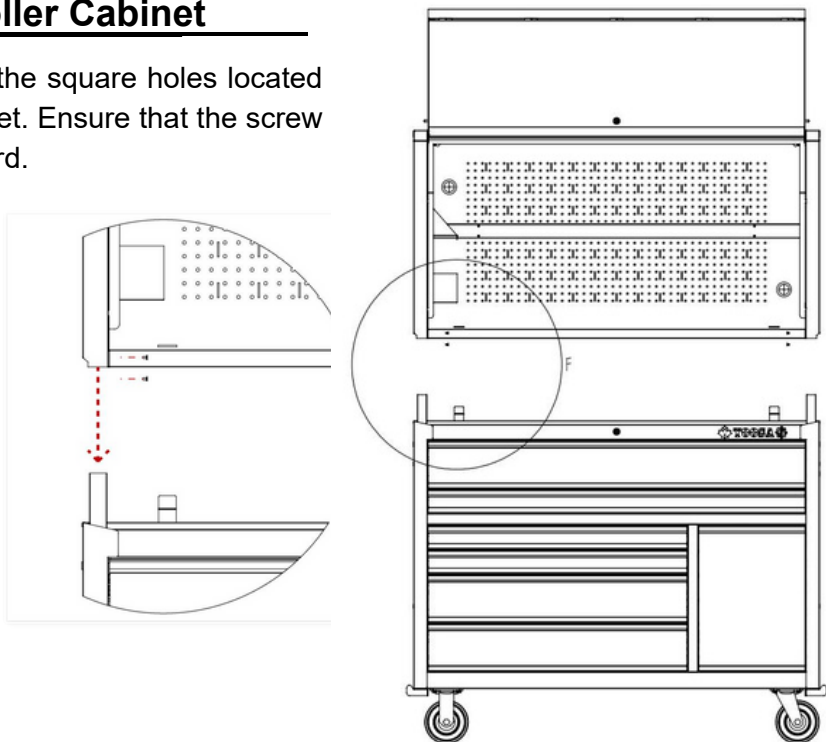


Attach Side Cabinet to Roller Cabinet


First, secure the bottom connector holder to the bottom of the roller cabinet using the provided M8x16 pan head hex socket screws.

Lift the side cabinet and position it onto the installed holder.

While doing so, ensure that the lip (or flange) of the side cabinet engages with and hooks over the top edge of the roller cabinet.

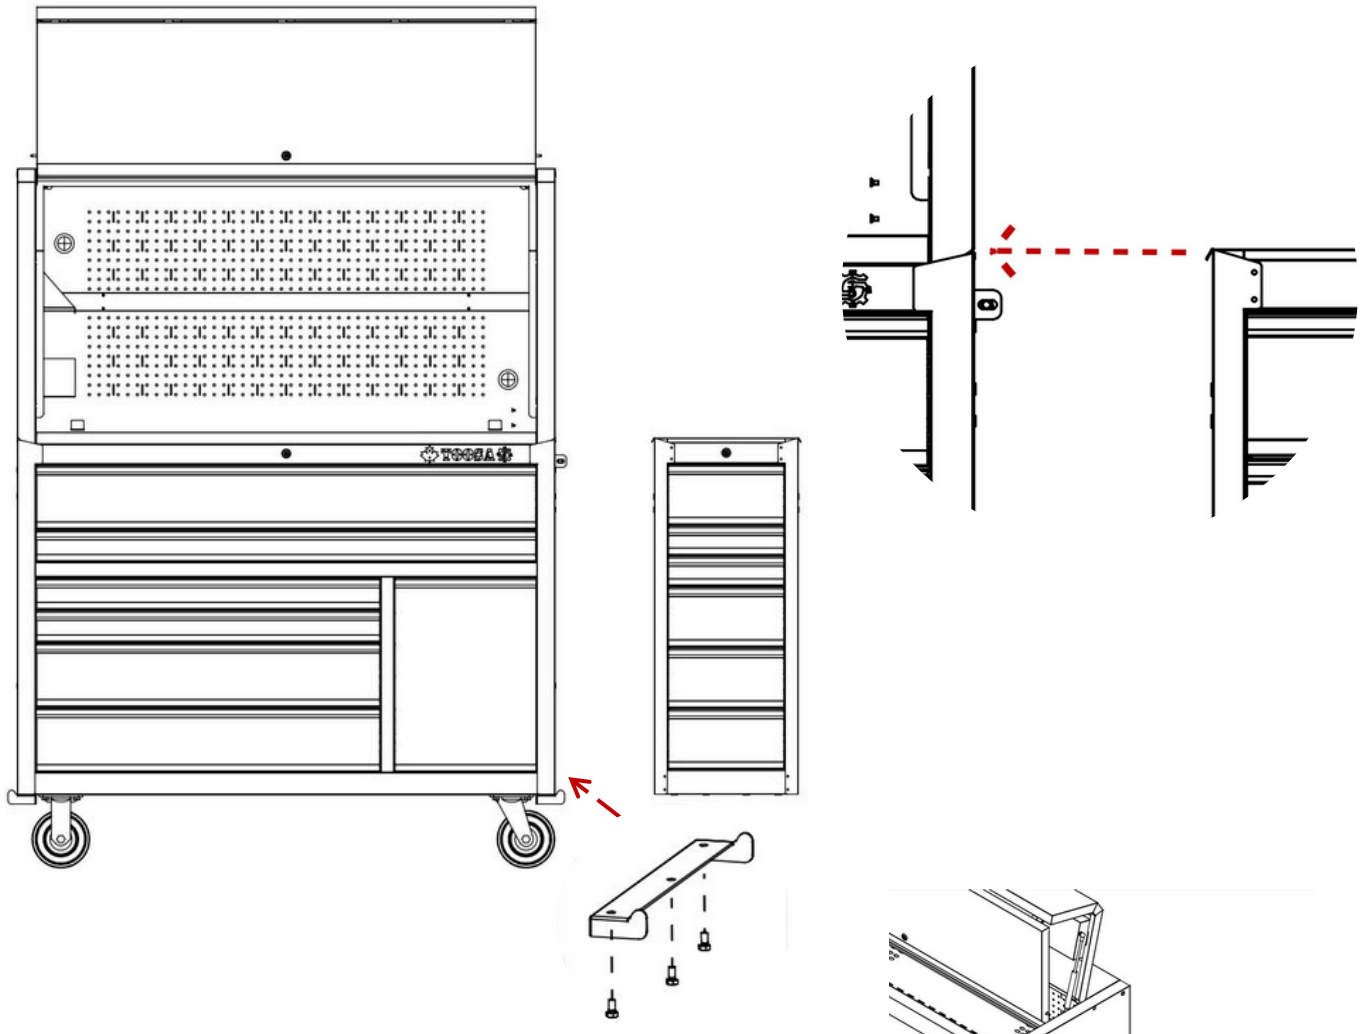

Attach the side handle to the side cabinet using 4 pieces of M8x16 pan head hex socket screws.

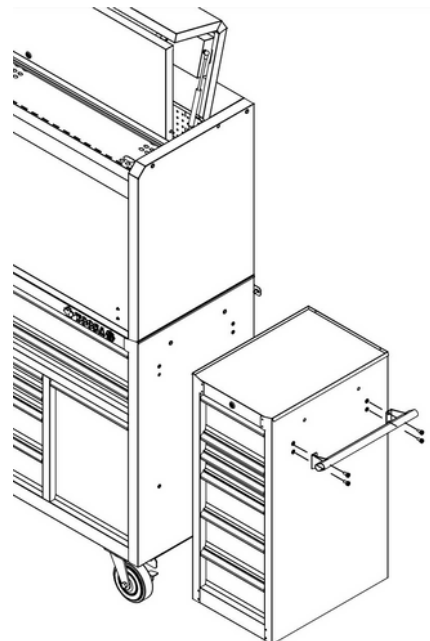


Attach Side Locker to Roller Cabinet

Fasten the bottom connector holder to the roller cabinet bottom first.

Lift the side locker, align it with the holder, and lower it into place.


Secure the top of the side locker to the hutch.

Fasten the side locker to the roller cabinet frame using the M8x16 pan head hex socket

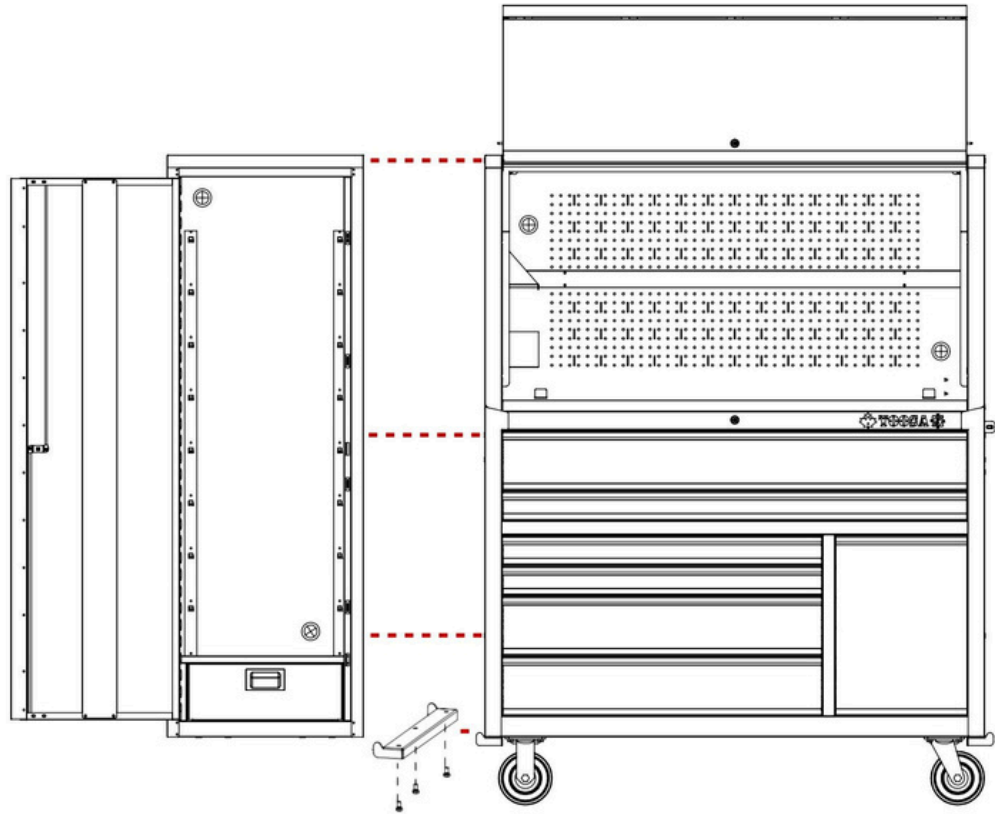

Install Five Shelves to Side Locker

Tilt the shelf slightly upward. Hook the front edge of the shelf into the mounting slots at the front of the side locker. Lower the back of the shelf until it rests securely on the rear support hooks.

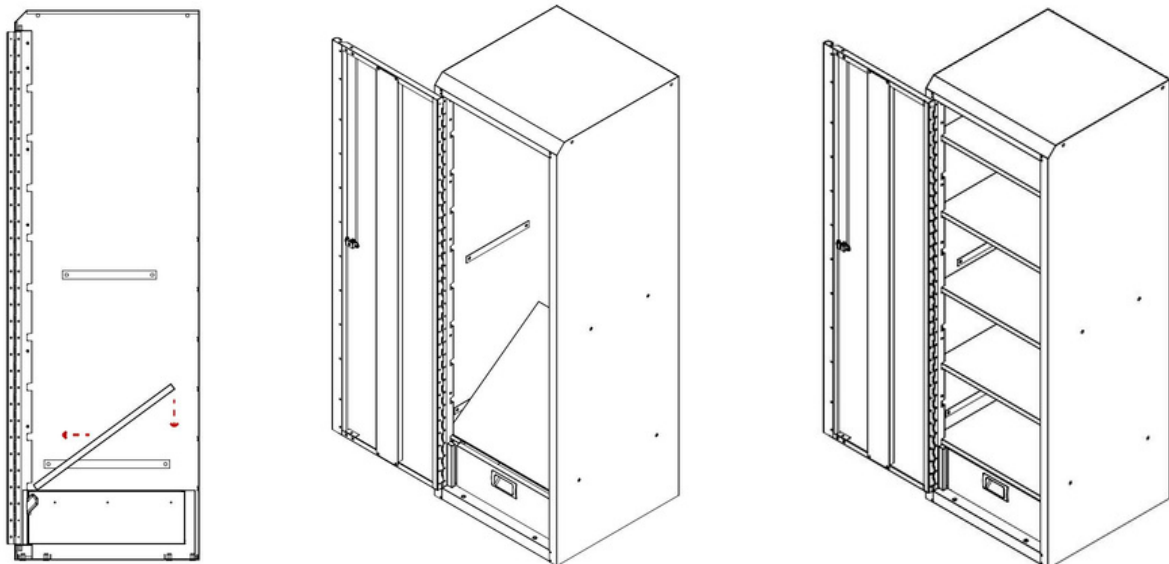


Secure the Side Cabinet, Roller Cabinet and Hutch on Back

Two types of connectors are provided:

For Hutch to Roller Cabinet: Secure the back connectors between the hutch and the roller cabinet.

For Side Cabinet to Roller Cabinet: Secure the back connectors between the side cabinet and the roller cabinet.

Use the M8x16 pan head hex socket screws to fasten all connectors to the respective cabinets.

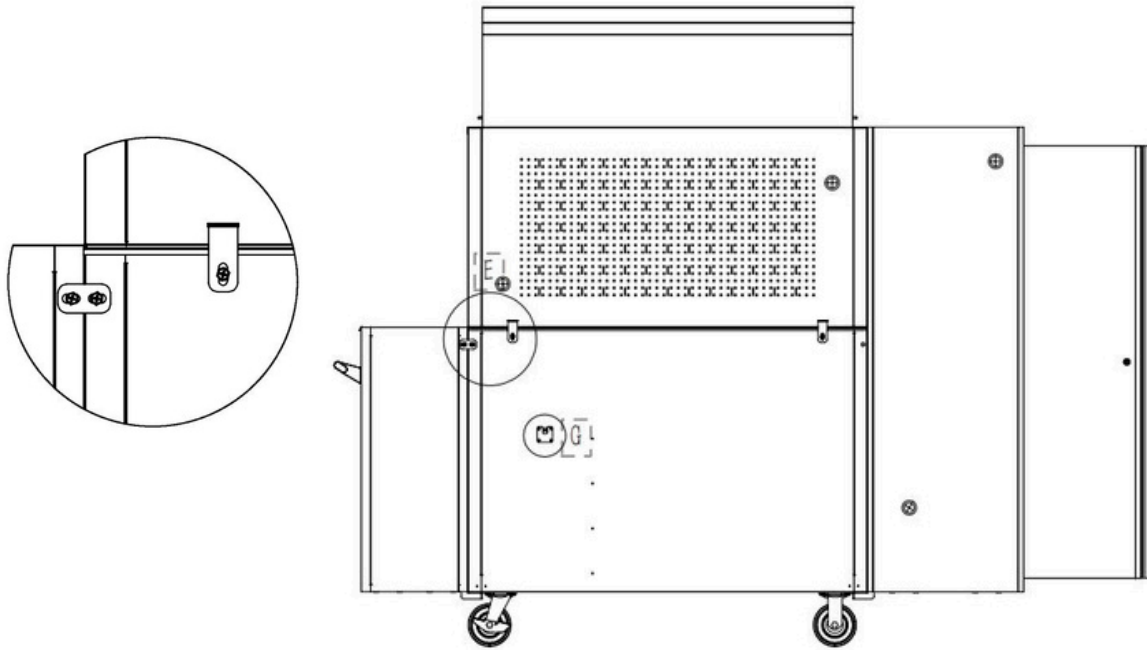

SPECIFICATIONS

Electrical Rating	Input: 15A, 100-125V, 60Hz, 1875W Max
	AC Output: 15A, 100-125V, 60Hz, 1875W Max USB Output: 5VDC 3A/9VDC 2.22A/ 12VDC 1.67A Type-C Output: 5VDC 3A/9VDC 2.22A/ 12VDC 1.67A Total USB Output: 20W (max)
Total Combined Weight Capacity (Evenly distributed from bottom up.)	2950 lb.
Drawer Capacity (per connected pair of slides)	150 lbs